



FEATURES

- Accuracy: $\pm 0.1\%$ R.O.
- Input potentiometer: total resistance $100\Omega \sim 10K\Omega$ (0 ~ 100%)
- Steady voltage, current and low ripple output
- Plug-in type

■ MODEL: S4 - PT - [] - [] - []


NO.	Input Range	NO.	DC Output Range	Load R.	NO.	Power Supply
1	0 ~ 100%	1	0 ~ 1V	$\cong 500\Omega$	1	AC 110V
0	Option	2	0 ~ 5V	$\cong 500\Omega$	2	AC 220V
		3	0 ~ 10V	$\cong 500\Omega$	3	DC 110V
		4	1 ~ 5V	$\cong 500\Omega$	4	DC 48V
		5	0 ~ 1mA	$\cong 10K\Omega$	5	DC 24V
		6	0 ~ 10mA	$\cong 1.5K\Omega$	0	Option
		7	0 ~ 20mA	$\cong 750\Omega$		
		8	4 ~ 20mA	$\cong 750\Omega$		
		0	Option			

*Input potentiometer(0 ~ 100%): total resistance $100\Omega \sim 10K\Omega$

SPECIFICATION

Accuracy: $\pm 0.1\%$ R.O.
 Power supply: AC 110 V $\pm 15\%$, 50/60HZ
 AC 220 V $\pm 15\%$, 50/60HZ
 DC 24V, 48V, 110V $\pm 10\%$
 Power consumption: AC $\leq 5VA$, DC $\leq 3W$
 Response time: ≤ 400 msec.
 Output ripple: $\leq 0.5\%$ R.O. (peak-peak)
 Span adjustment range: $\cong \pm 20\%$ R.O.
 Zero adjustment range: $\cong \pm 10\%$ R.O.
 Operating temperature rang: 0 ~ 60°C
 Storage temperature rang: -10 ~ 70°C
 temperature rang coefficient: $\leq 150PPM/^\circ C$
 Max. relative humidity: 95%
 Isolation: Input/Output/Power/Case
 Insulation resistance: $\geq 100M\Omega$, DC 500 V
 Dielectric strength: Input/Output/Power AC 1.8KV/minute
 All terminal/Case AC 1.8KV/minute
 Impulse withstand test: 3KV, 1.2 x 50 μs
 Common mode & Differential mode

DIMENSIONS (UNIT : mm)

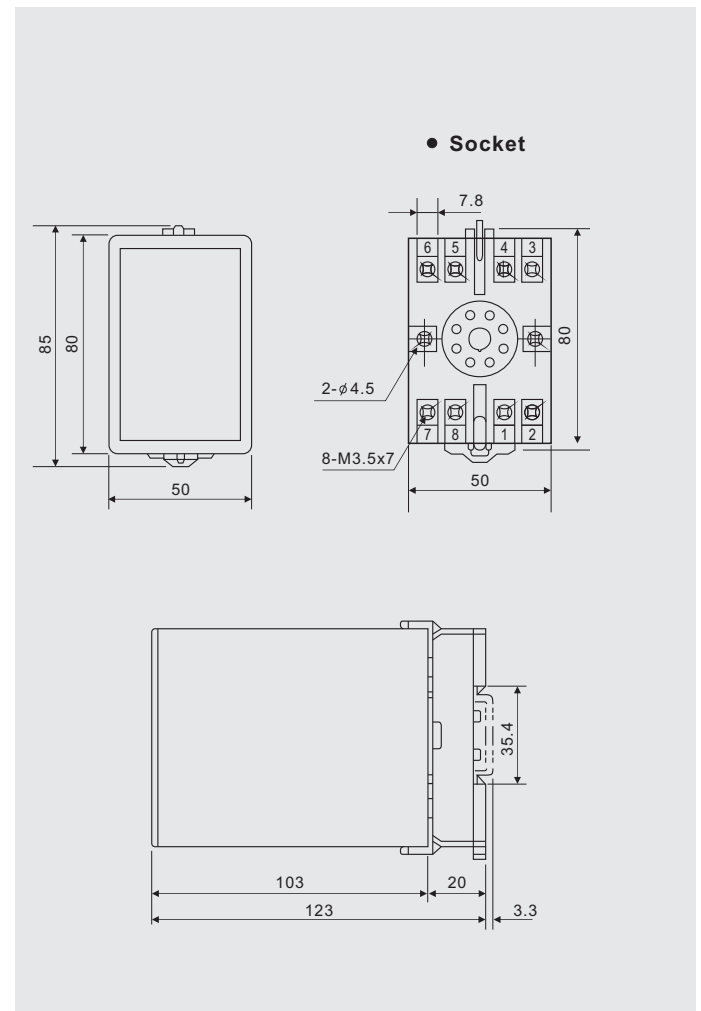

CONNECTION DIAGRAM

