



FEATURES

- Accuracy: $\pm 0.2\%$ R.O.
- Wide input and output range selection
- Steady voltage, current and low ripple output
- Cold junction compensated
- Plug-in type

MODEL: S4 - TT - T - [] - [] - [] - []

NO.	Input Type	NO.	Input Range	NO.	DC Output Range	Load R.	NO.	Power Supply
1	K (CA)	A I	- 50 ~ 100 °C 0 ~ 1200 °C	V1	0 ~ 100 mV	$\cong 100\text{K}\Omega$	1	AC 110V
2	J (IC)	B J	- 150 ~ 150 °C 0 ~ 1400 °C	V2	0 ~ 5V	$\cong 500\Omega$	2	AC 220V
3	T (CC)	C K	0 ~ 100 °C 0 ~ 1600 °C	V3	1 ~ 5V	$\cong 500\Omega$	3	DC 110V
4	E (CRC)	D L	0 ~ 200 °C 300 ~ 600 °C	V4	0 ~ 10V	$\cong 500\Omega$	4	DC 48V
5	R (RR)	E M	0 ~ 400 °C 400 ~ 800 °C	A2	0 ~ 10mA	$\cong 1.5\text{K}\Omega$	5	DC 24V
6	S	F N	0 ~ 600 °C 600 ~ 1200 °C	A3	0 ~ 20mA	$\cong 750\Omega$	0	Option
7	N	G O	0 ~ 800 °C 700 ~ 1400 °C	A4	4 ~ 20mA	$\cong 750\Omega$		
8	B	H P	0 ~ 1000 °C 800 ~ 1600 °C	0	Option			

SPECIFICATION

Accuracy..... $\pm 0.2\%$ R.O. $\pm 0.5\text{ }^\circ\text{C(RJC)*}$


Type	Temp. Range	Rated of Output	Erro
K	0 ~ 1200 °C	1200	$\pm 1.2\text{ }^\circ\text{C}$
J	0 ~ 600 °C	600	$\pm 0.6\text{ }^\circ\text{C}$
T	-150 ~ 400 °C	550	$\pm 0.5\text{ }^\circ\text{C}$
E	0 ~ 600 °C	600	$\pm 0.6\text{ }^\circ\text{C}$
R	0 ~ 1600 °C	1600	$\pm 1.6\text{ }^\circ\text{C}$
S	0 ~ 1400 °C	1400	$\pm 1.4\text{ }^\circ\text{C}$
N	0 ~ 1200 °C	1200	$\pm 1.2\text{ }^\circ\text{C}$
B	600 ~ 1600 °C	1000	$\pm 1.0\text{ }^\circ\text{C}$

*Accuracy is subject to changes in measured temp.

Power supply..... AC 110 V $\pm 15\%$, 50/60HZ
 AC 220 V $\pm 15\%$, 50/60HZ
 DC 24V,48V,110V $\pm 10\%$

Power consumption..... AC $\leq 5\text{VA}$, DC $\leq 3\text{W}$
 Input resistance..... $\cong 20\text{M}\Omega$
 Input break detection..... Hi-set $\cong 110\%$ of rated output
 Response time..... $\cong 600\text{ msec.}$ (0-90%)
 Output ripple..... $\cong 0.5\%$ R.O.(peak-peak)
 Span adjustment range..... $\cong \pm 5\%$ R.O.
 Zero adjustment range..... $\cong \pm 2\%$ R.O.
 Operating temperature rang..... 0 ~ 60 °C
 Storage temperature rang..... -10 ~ 70 °C
 temperature rang coefficient..... $\cong 150\text{PPM}/^\circ\text{C}$
 Max. relative humidity..... 95%
 Isolation..... Input/Output/Power/Case
 Insulation resistance..... $\cong 100\text{M}\Omega$, DC 500 V
 Dielectric strength..... Input/Output/Powe AC 1.8KV/minute
 All terminal/Case AC 1.8KV/minute
 Impulse withstand test..... 3KV, 1.2 x 50 μs
 Common mode & Differential mode

CONNECTION DIAGRAM

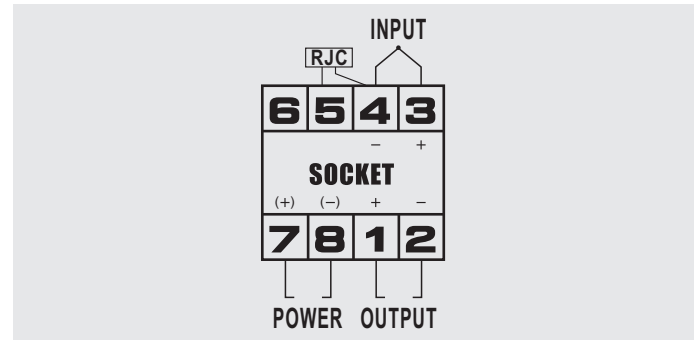

DIMENSIONS (UNIT : mm)

